
INSTRUCTION
WALL PACK SERIES

WARNING!


READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

- TO AVOID ELECTRIC SHOCK OR COMPONENT DAMAGE, TURN OFF POWER BEFORE ATTEMPTING INSTALLATION OR SERVICING.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE (NEC) AND ALL APPLICABLE FEDERAL, STATE AND LOCAL ELECTRIC CODES AND SAFETY STANDARDS.
- USE CAUTION WHEN HANDLING THIS PRODUCT DURING OR AFTER OPERATION AS IT MAY BECOME HOT AND CAUSE BURNS. DISCONNECT PRODUCT AND ALLOW COOLING PRIOR TO SERVICING.
- ANY ALTERATION OR MODIFICATION OF THIS PRODUCT IS EXPRESSLY FORBIDDEN AS IT MAY CAUSE SERIOUS PERSONAL INJURY, DEATH, PROPERTY DAMAGE AND/OR PRODUCT MALFUNCTION.
- TO PREVENT PRODUCT MALFUNCTION AND / OR ELECTRICAL SHOCK THIS PRODUCT MUST BE PROPERLY GROUNDED.
- MOUNTING ABOVE 1.2M (4FT) OF THE GROUND
- USE MIN 90 °C SUPPLY CONDUCTORS.
- SUITABLE FOR WET LOCATION,USE UL APPROVED WET LOCATION JUNCTION BOXES AND CONDUIT.


What's in the box.



One (1) Wallpack




One (1) EVA Gasket



Three (3+2) Terminals

Tools needed (Provided by others)

A screwdriver,drill,a pair of wire strippers,and 3-4 pc fasteners appropriate for the mounting surface will be needed to install the wallpack.

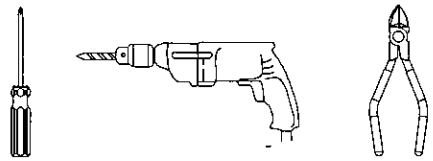


CCT and POWER SETTING

You will find two switchs inside of the fixture. Select the desired CCT and Wattage by setting the switch to the corresponding setting.

Note: To avoid electric shock or component damage, do not use the cct switch and power switch after power-on.

CCT Selectable

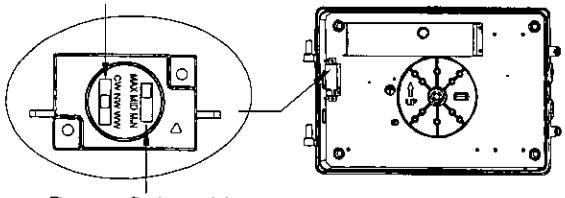


Power Selectable

Photocell SETTING

Connect or disconnect the plug to control the opening or closing of the photocell.

Connect the plug,the photocell is ON.

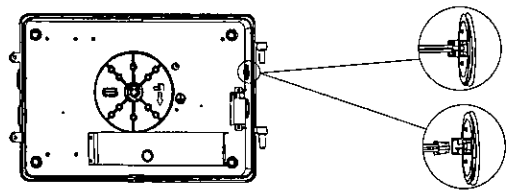


Disconnect the plug,the photocell is OFF.

Installation Instructions


① Ensure that power is turned off at appropriate circuit breaker.

② Carefully unpack fixture from packaging and inspect for any damage caused in shipping.

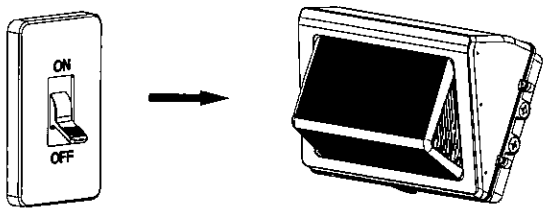


③ Use a screwdriver to loosen Two(2) screws.

④ Open the fixture.

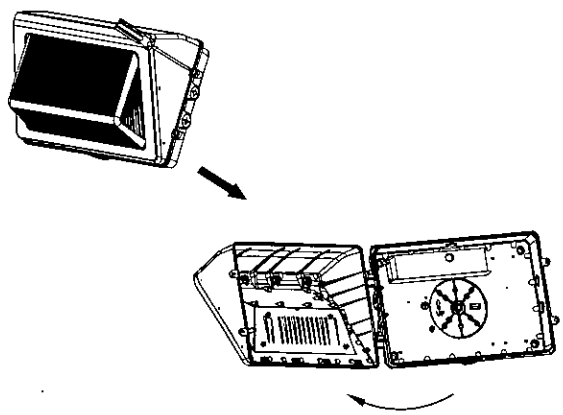


⑤ Drill through the appropriate mounting hole for mounting to a surface wall mount.

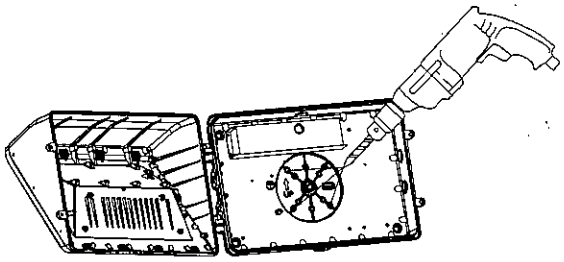


⑥ Use a screwdriver to remove plug.

Note: 6a is for junction box mounting (remove the bottom plug .


6b is for conduit mounting (removed the side plug).

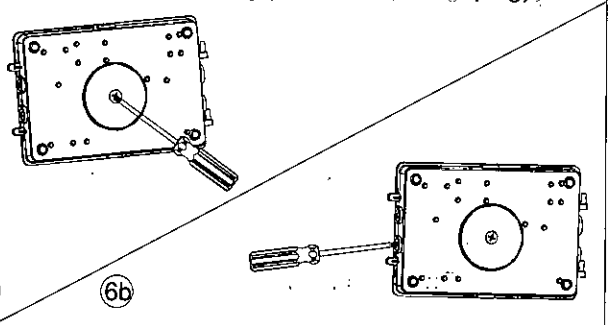

⑦ Attach the self-adhesive EVA gasket to the back of the housing to cover the junction box or mounting hole.




⑧ Pull building wires through open hole. Align and mount the fixture to the wall surface. Wiring per wiring diagram.

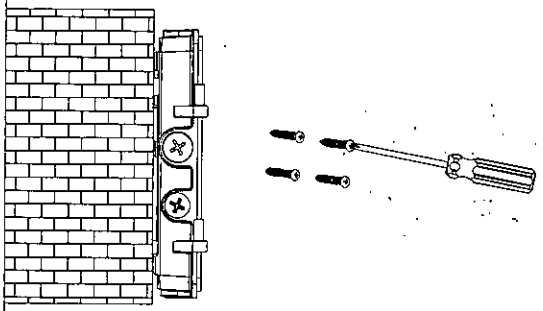


IMPORTANT: To weather-proof your outdoor installation, be sure to seal all mounting points, wire inlets, and penetrations (Conduit, Plugs, etc.) with silicone sealant.

⑨ Make sure the door gasket is properly seated Around the perimeter.Close front cover and secure by tightening the two(2) screws on the side.

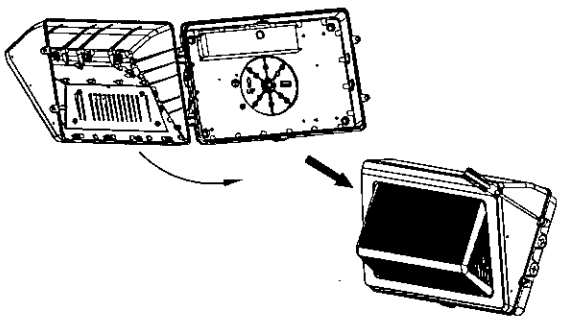

⑩ Connect wiring as shown in Wiring Diagram. Cap off dimming wires if not used.

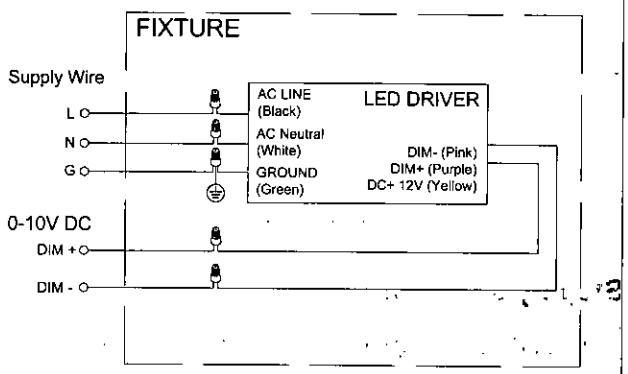

Note: Disconnected and cap off if not used.

Emergency LED driver kit

If you product includes emergency battery backup, please use the following wire diagram as reference.

