

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com



Customer Name:
Project Name:
Fixture Type:



GE
Lighting

14554 - 25PAR36/NSP

GE PAR36 - Narrow Spot

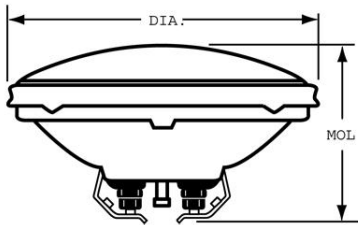

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Wattage	25
Voltage	12
Rated Life	2000 hrs
Primary Application	Narrow Spot

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	150
Beam Spread	9 °
Beam Spread - Horizontal	9.0 - 50.0 °
Beam Spread - Vertical	9.0 - 50.0 °
Center Beam Candlepower (CBCP)	2600
Max. Beam Candlepower (MBCP)	2600
Nominal Initial Lumens per Watt	6

DIMENSIONS

Maximum Overall Length (MOL)	2.75 cm
Bulb Diameter (DIA)	4.5 cm
Bulb Diameter (DIA) (MAX)	4.5 cm

PRODUCT INFORMATION

Product Code	14554
Description	25PAR36/NSP
Standard Package	Case
Standard Package GTIN	00043168145541
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168906449

NOTES

- Filament shield masks direct light
- Top end of bulb is opaque-coated to absorb upward light