




S-8
MINIATURE LAMPS

*Specifications for second filament

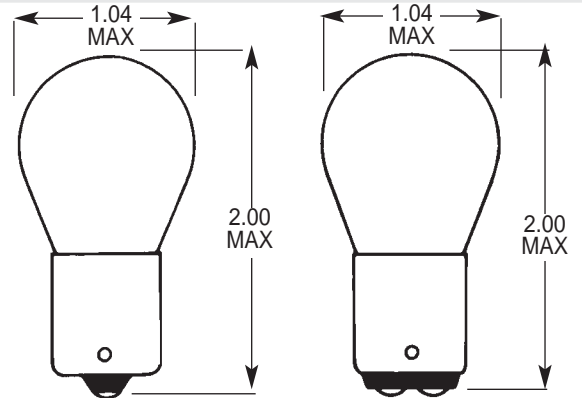

LINE NO.	VOLTS	AMPS	MSCP	LIFE	FILAMENT	SINGLE CONTACT BAYONET BASE	DOUBLE CONTACT BAYONET BASE
1							
2	2.50	1.50	3.20	15	S-2		1492
3	4.00	2.00	8.80	100	C-2R		1584
4	4.00	0.80	2.50	300	C-2R	1459	
5	5.00	0.60	3.00	20	C-2R	1651	
6	5.40	1.90	10.00	1,000	C-6		1612
7	6.00	5.00	36.00	250	C-6		1594
8	6.00	1.50	13.00	50	C-6	1613	
9	6.00	4.10	32.00	400	C-6	1680 X	
10	6.00	4.10	32.00	300	C-6	1680	
11							
12	6.40	2.63	21.00	200	C-6	1129	1130
13	6.40	2.63	21.00	200	C-6	1605	1158
	7.00	0.75	3.00	1,000	C-6		*
14	6.40	2.69	21.00	200	C-2V		1608
15	6.40	2.80	21.00	200	C-2V		1618
16	6.40	3.00	23.00	500	C-2R		6
17	6.50	2.75	23.00	100	C-6		1497
18	6.50	2.75	23.00	200	C-6		1493
19	6.70	1.90	15.00	500	C-6	1619	
20	8.00	2.00	21.00	500	C-6		1648
21	6.80	1.91	15.00	300	C-6	87	88
22	12.50	3.00	50.00	300	C-2R	1295	
23	12.80	1.04	15.00	700	C-6	93	94
24	12.80	1.35	22.00	500	CC-6	1161	
25	12.80	1.44	21.00	1,000	C-6	1141	1142
26	12.80	1.52	26.00	400	C-2R	1777	
27	12.80	1.80	32.00	200	C-6	1073	1076
28	12.80	2.10	32.00	1,200	C-6	1156	
29	12.80	2.25	32.00	1,200	C-6	199	
30							
31	12.80	1.26	21.00	300	C-2R		1005
	12.80	1.26	21.00	300	C-6		*
32	12.80	1.34	21.00	300	C-6		1176
	14.00	0.59	6.00	1,500	C-6		*
33	12.80	1.34	21.00	500	C-2R		1152
34	14.00	0.51	4.00	5,000	C-6	1095	

S-8 CONTINUED ON NEXT PAGE



S-8 continued

28 Volts & Higher

LINE NO.	VOLTS	AMPS	MSCP	LIFE	FILAMENT	SINGLE CONTACT BAYONET BASE	DOUBLE CONTACT BAYONET BASE
1							
2	28.00	0.42	10.00	500	C-2V		1696
3	28.00	0.51	15.00	300	C-2V	305	306
4	28.00	0.51	15.00	300	C-2V	305-FROSTED	
5	28.00	0.51	15.00	300	C-2V	305-RED	
6	28.00	0.51	15.00	300	C-2V	305-TF	
7							
8	28.00	0.61	15.00	1,000	C-2R	1691	1692
9	28.00	0.61	15.00	1,000	C-2R	*	*
10	28.00	0.61	15.00	1,000	C-2R	1691-FROSTED	1692-FROSTED
11	28.00	0.61	15.00	1,000	C-2R	*	*
12	28.00	0.61	15.00	1,000	C-2R	1591	
13							
14	28.00	0.64	17.00	2,000	CC-8I	2232	
15	28.00	0.64	17.00	2,000	CC-8I	2232-FROSTED	
16	28.00	0.64	17.00	2,000	CC-8I	2232-TF	
17							
18	28.00	0.67	21.00	300	C-2V	307	308
19	28.00	0.67	21.00	300	C-2V	307-FROSTED	308-FROSTED
20	28.00	0.67	21.00	300	C-2V	307-RED	308-RED
21	28.00	0.67	21.00	300	C-2V	307-TF	308-TF
22							
23	28.00	0.71	21.00	400	C-2V	1203	1204
24	28.00	0.76	21.00	1,000	CC-6	1563	
25							
26	28.00	0.77	21.00	2,000	CC-8I	2233	
27	28.00	0.77	21.00	2,000	CC-8I	2233-FROSTED	
28	28.00	0.77	21.00	2,000	CC-8I	2233-TF	
29							
30	28.00	0.80	21.00	1,000	C-2V	1665	
31	28.00	0.80	21.00	1,000	C-2V	1665-FROSTED	
32							
33	28.00	0.90	32.00	300	C-2V	315	
34	28.00	0.90	32.00	300	C-2V	315-FROSTED	
35							
36	28.00	1.02	32.00	500	C-6	1683	1638
37	28.00	1.02	32.00	500	C-6	*	*
38	28.00	0.68	21.00	300	CC-6		1666
39	28.00	0.68	21.00	300	CC-6		*
40	30.00	0.90	19.00	5,000	CC-2V		1080
41	34.00	0.45	15.00	275	CC-2V		1228
42	36.00	0.72	32.00	300	CC-6	SP-7	
43	38.00	0.29	8.00	300	CC-6	SP-14	
44	40.00	0.38	15.00	400	C-2V		1229
45	40.00	0.53	14.00	3,800	CC-2V (SUPPORTED)		895
46	44.00	0.17	6.00	200	C-7A	109	110
47	45.50	0.22	7.60	1,000	CC-2V (SUPPORTED)		1676

- **FROSTED:** INSIDE FROSTED TO PROVIDE DIFFUSED LIGHT SOURCE.
- **RED:** EXTERNAL RED COLOR COATING MEETING FAA "AVIATION RED" SPECIFICATIONS.
- **TF:** EXTERNAL RUBBERIZED "TUFF-COATING"® FOR SHATTER-PROOF APPLICATIONS.